




# Right Connections...

SUPPLIERS OF TOWBAR WIRING KITS FOR THE UK

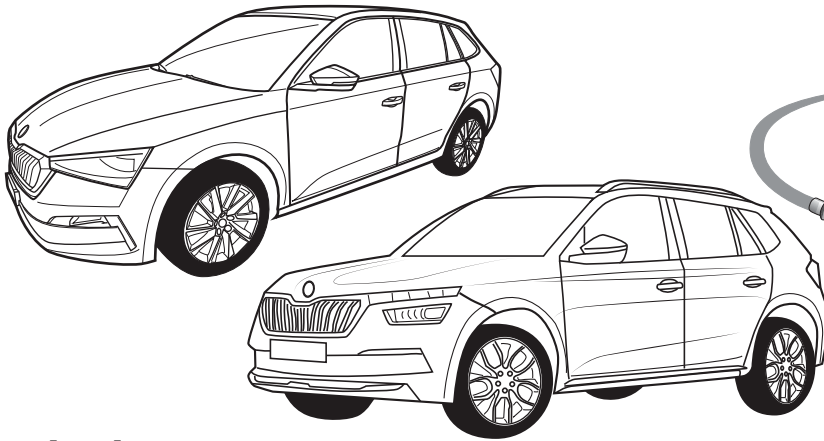


## Skoda

**Scala 04/2019 >>**  
**Kamiiq 09/2019 >>**

**Part No: VW-204-13M**

## Electric wiring kit for towbars / 13-pin / 12 Volt / ISO 11446 Fitting instructions

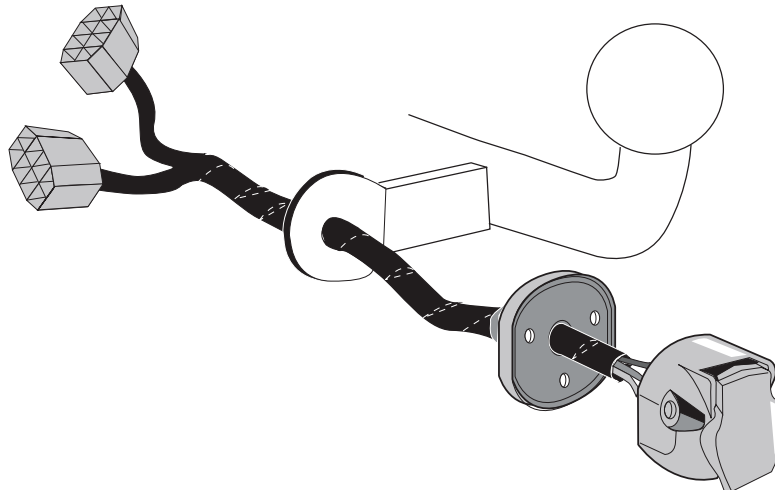

### IMPORTANT!

This electric kit has to be installed by a professional workshop or a suitable qualified person.

The installation instructions must have been read and fully understood before the start of any installation. Please contact your wiring kit provider or the hotline shown in the footer should you need assistance!

Make sure the vehicle is approved/homologated by the manufacturer to tow a trailer!

Also please check that there is a definite compatibility between this vehicle and the electric kit!

Following the installation of the electric kit, the fitting instructions should be kept together with the vehicle service document and vehicle handbook. The fitting instructions contain important information relating to the use and function of the towing kit as well as for any diagnostic or activation process, that might have to be repeated in the future (e.g. after the performance of a vehicle software update).

All warranty claims will be forfeited if the electric kit or components contained therein are used incorrectly or modified. If a towing socket adaptor has been used to connect to the trailer or bike rack, this must be removed from the trailer socket once the trailer or bike rack has been disconnected.

If the trailer or bike rack is not equipped with a rear fog lamp, depending on the towing vehicle type, the correct function of the towing kit cannot be guaranteed. In such cases, a rear fog lamp should be retro fitted.

This towing electric kit will not be covered under warranty if any technical or electrical modifications or software updates have been performed by the vehicle manufacturer after the initial commissioning of the kit. That applies especially to modifications or updates which may cause malfunctions in the trailer socket or any other part of the trailer electrical equipment!

Depending on the type of trailer module used in this electric kit, diagnostic interrogation with the vehicle's electrical system may be limited or will not function. The error memory inside the trailer module may not be able to be accessed by vehicle manufacturers diagnostic system.

Error logs relating to the trailer electrical equipment, that may be generated in the vehicle manufacturers diagnostic system as a result of a test procedure, may be due to the incorrect installation of the towing electric kit or the false activation of the trailer module.

**We always recommend whenever possible, the following troubleshooting process:**

→ **An analysis of the vehicle's error memory and possibly clearing of all faults before the start of the installation!**


→ **Try disconnecting the trailer module from the towing harness and re-start the fault clearing process!**

→ **If in doubt, limit the time for troubleshooting to a max of 0,5 hours and call our Technical Support Team!**


Please follow our instructions carefully and always test the towing electrics using a true lighting board or a specifically designed bulb tester. If an LED tester is used, ensure it is equipped with correct load resistors or malfunctions will occur!

This instruction is subject to changes and we reserve the right to make changes to design, colour etc.

All of the data and illustrations may not be an exact representation but the text contained in this instruction must be observed!



M



G




B



A





M1



T




X



5x

### VW-204-YZ

U2



U1



2x



15 Amp. minifuse



2x



1x



1x



3x



3x



3x



1x



1x



2x




1x




1x









1x




10x




3x

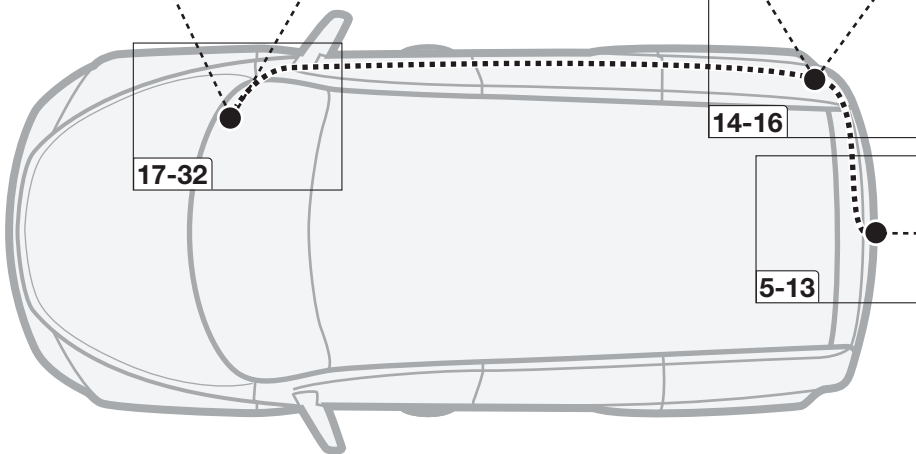





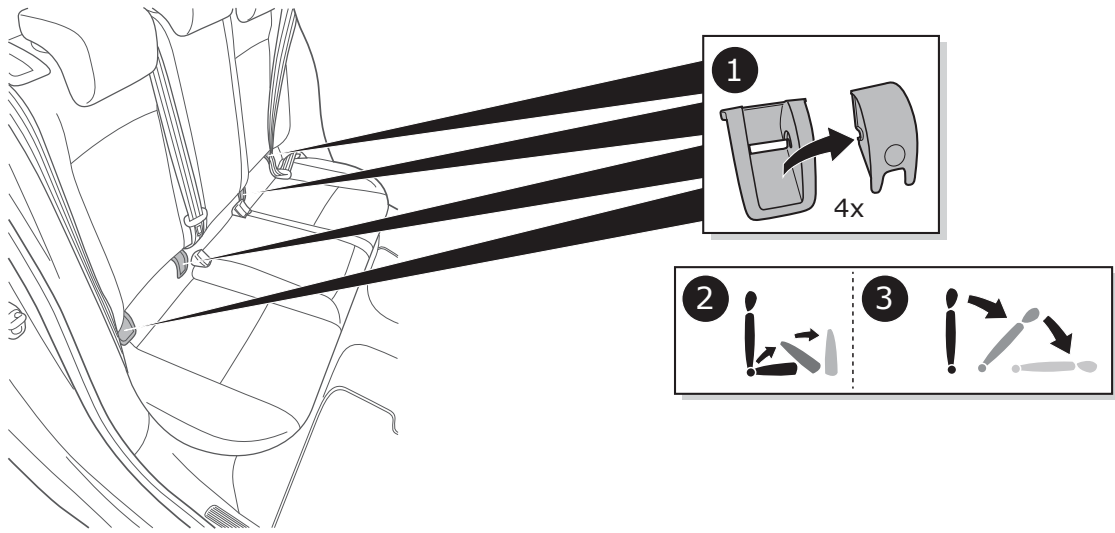





2

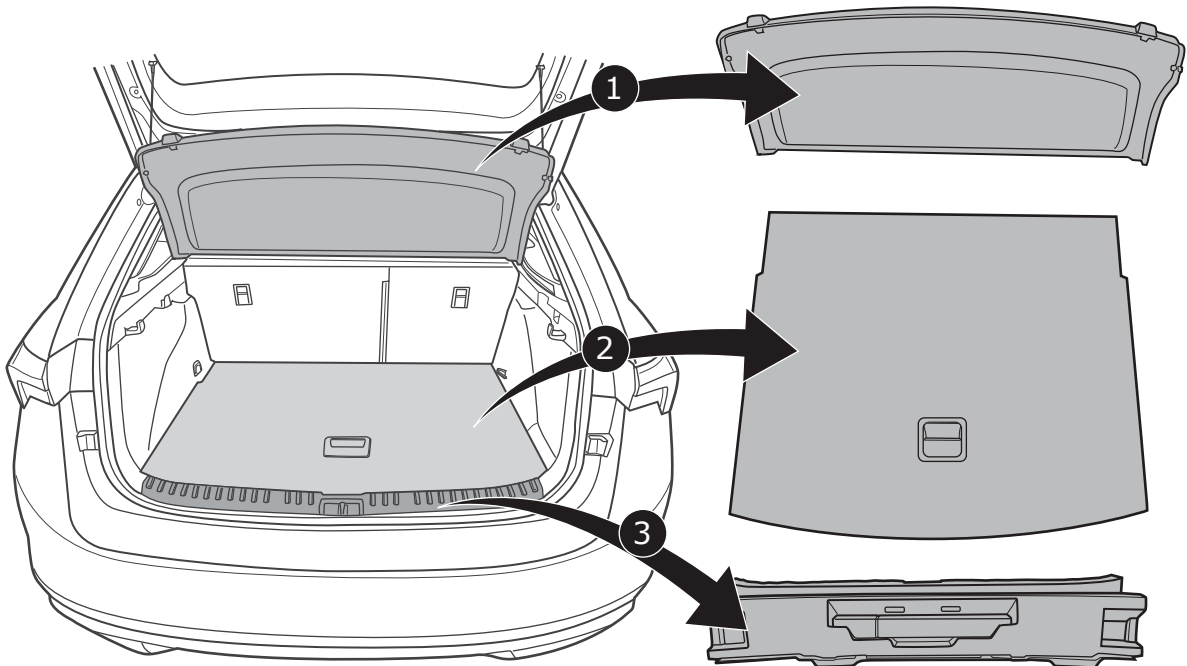


3

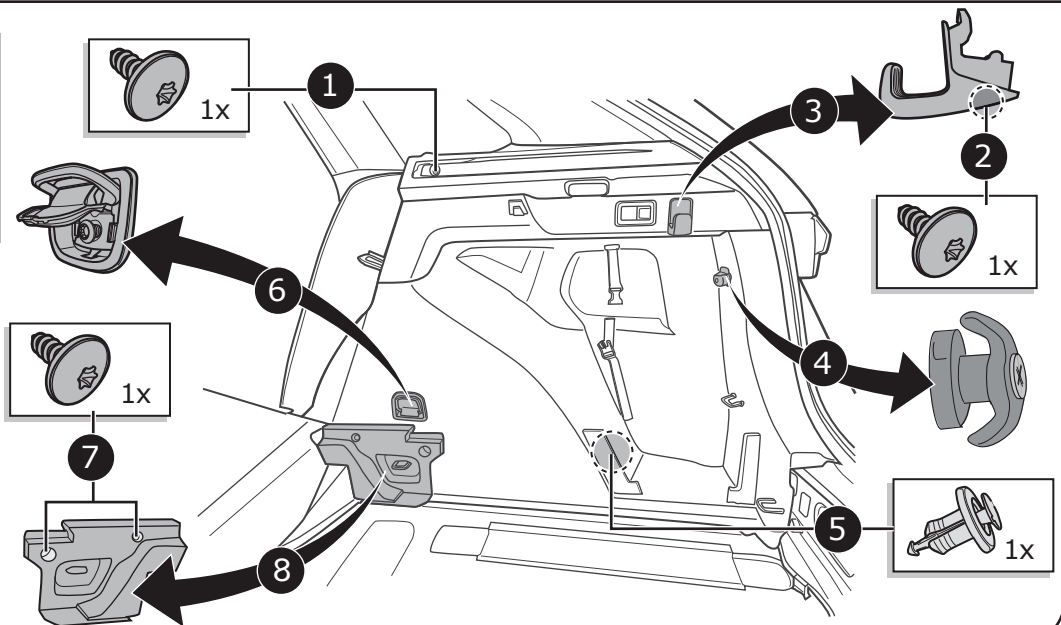



4

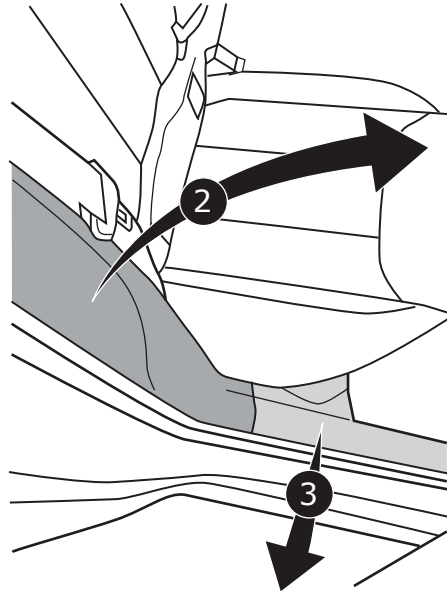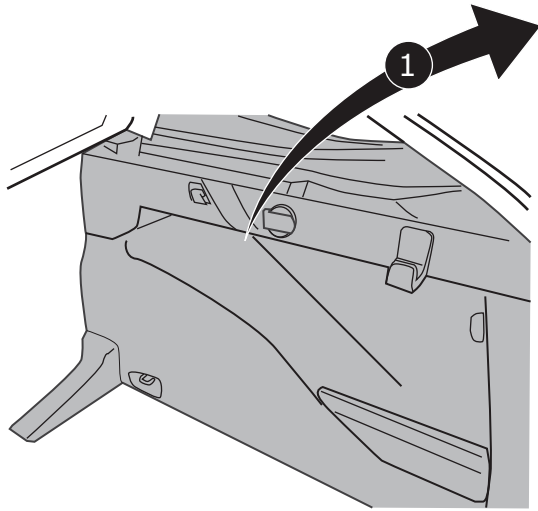


5








Option 1

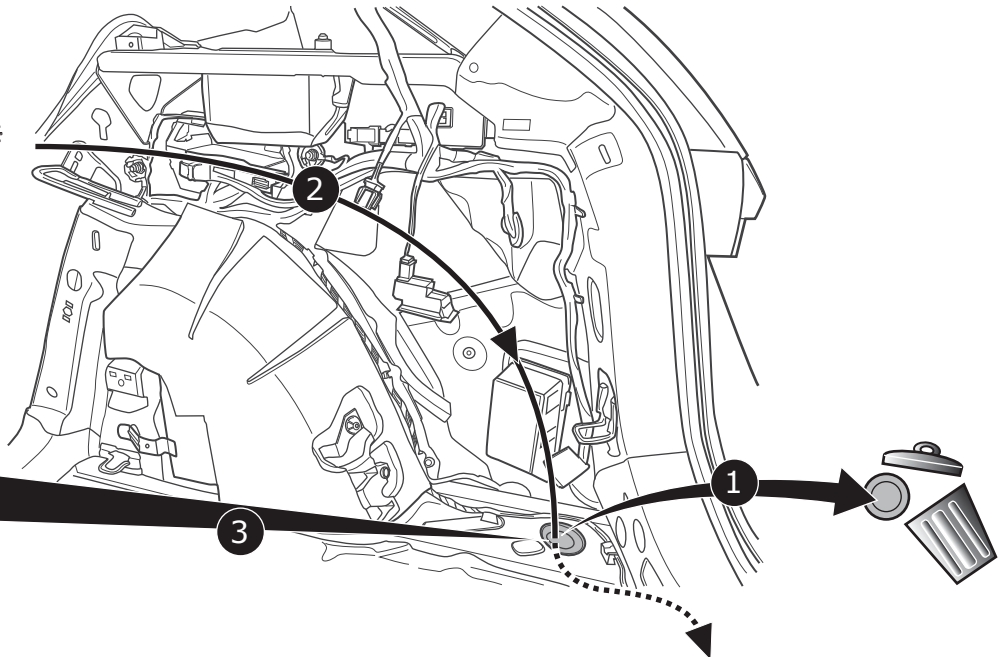


6



**Option 2**

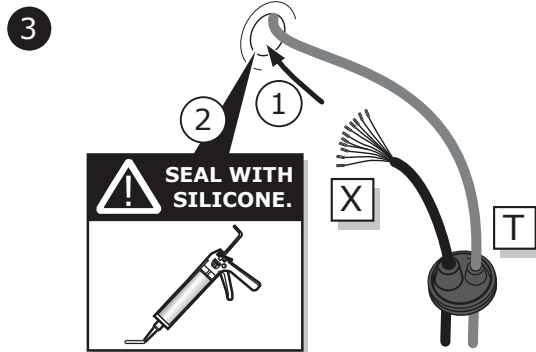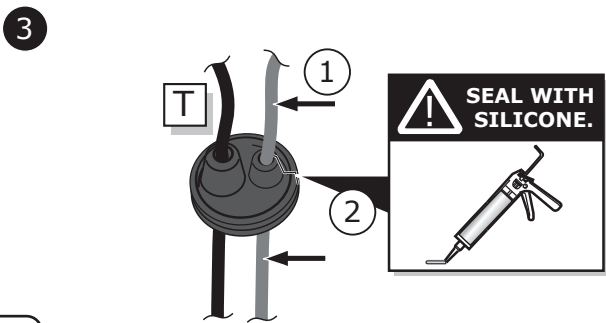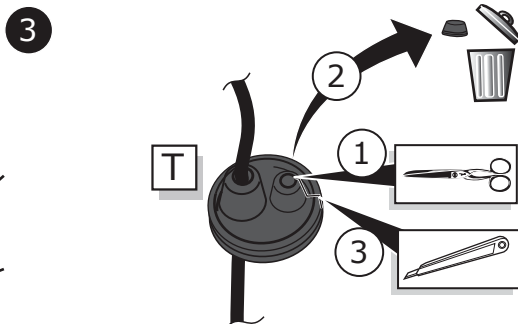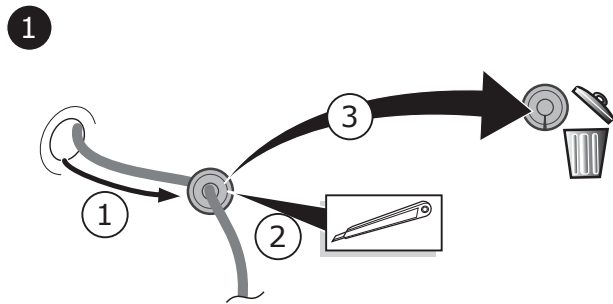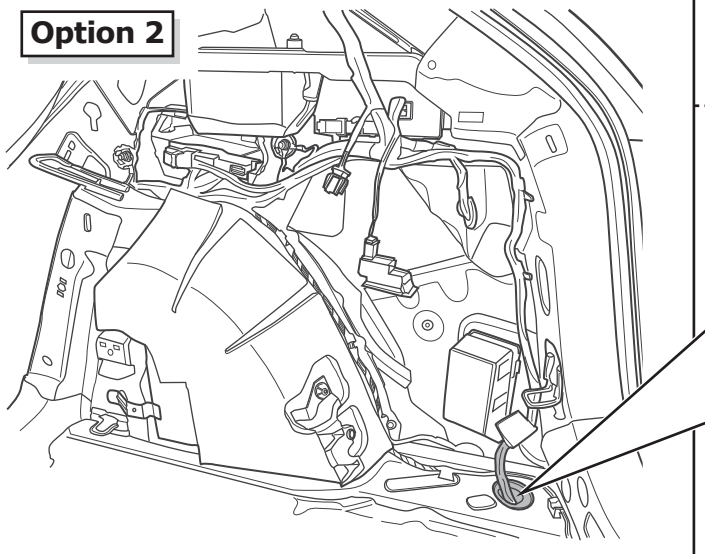


7

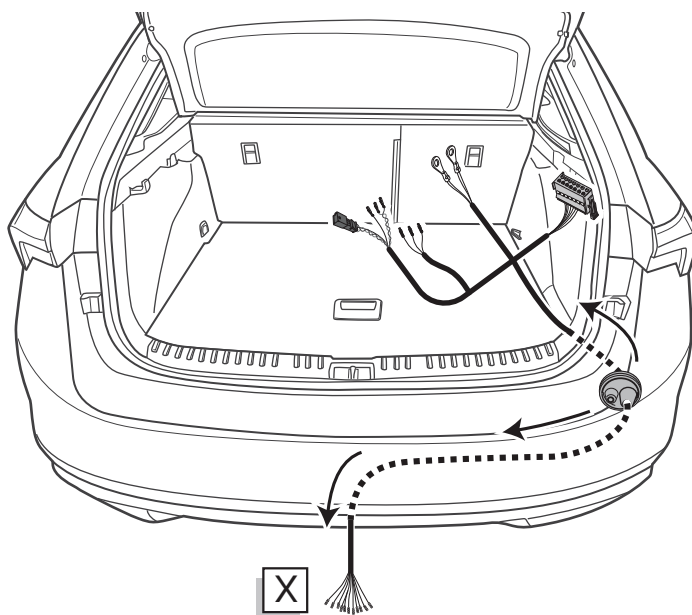


8

Option 1

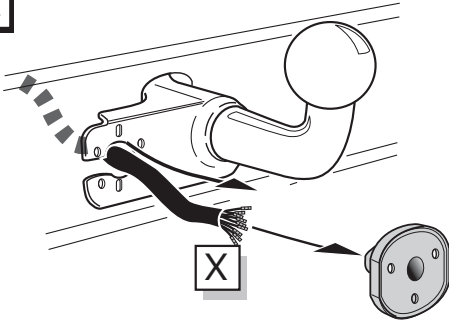

Option 2

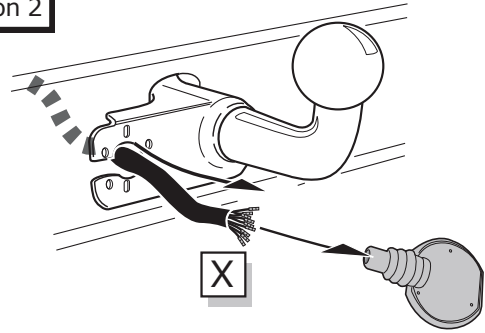



9

### SOCKET CONNECTION

DIN/ISO 11446	↔ L	⊘	≡ 1-8	↔ R	☀	⊘ STOP	☀	Reverse	30+	15+	≡ 10	—	≡ 9
	1/L	2	3/31	4/R	5/58-R	6/54	7/58-L	8	9	10	11	12	13
Pmax	21W	21W		21W	42W	3x21W	42W	21W	240W	180W			
Colour	Yellow	Blue	White	Green	Brown	Red	Black	Pink	Orange	Grey	White/Black	-	White/Red





10

Option 1

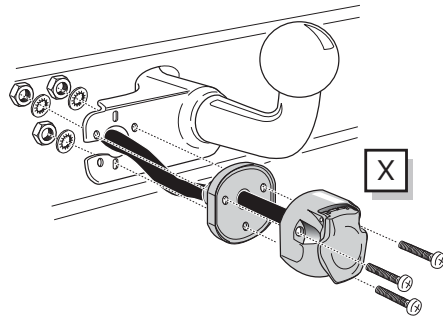





11

Option 2

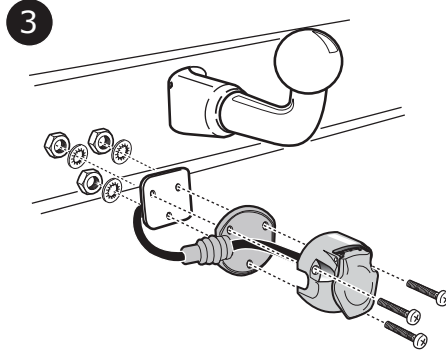




12


Option 2

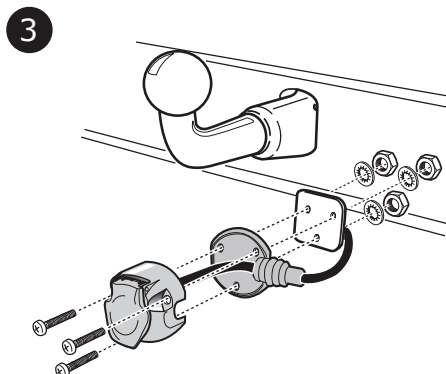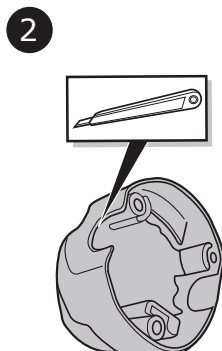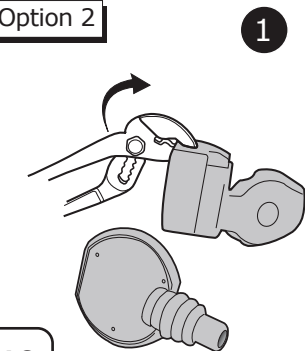


13

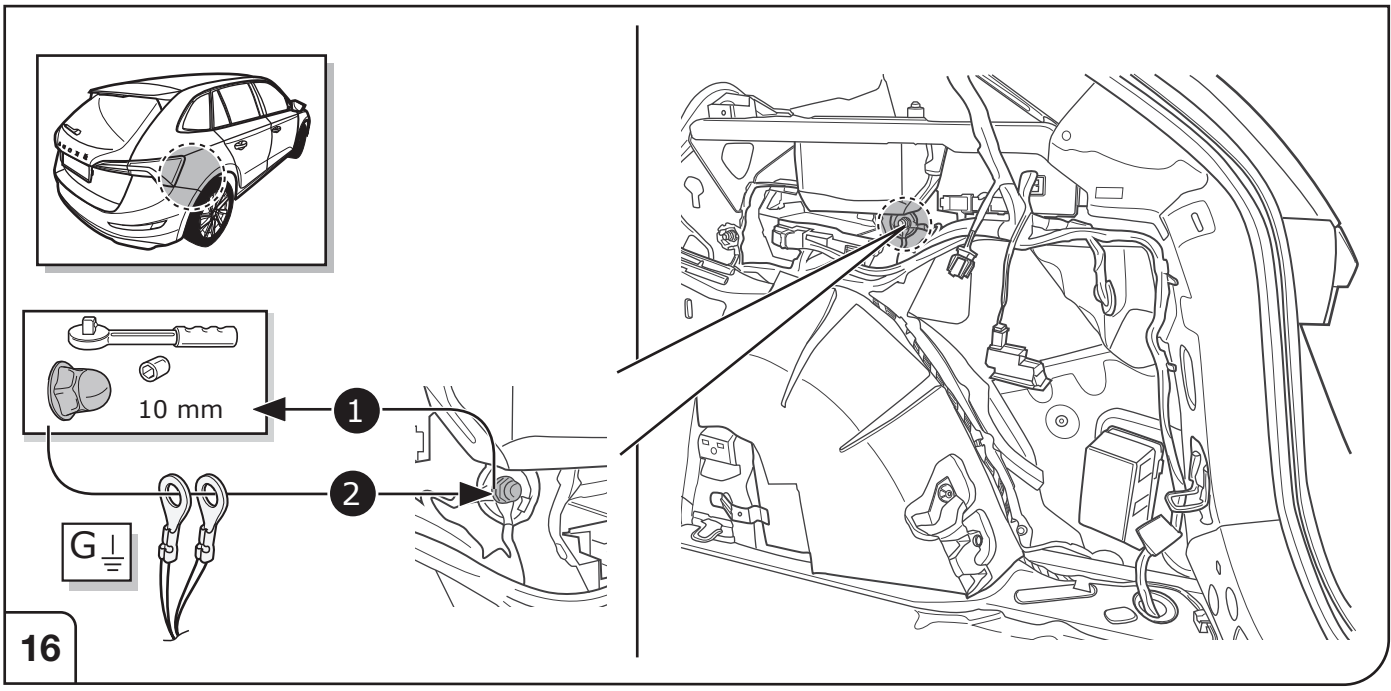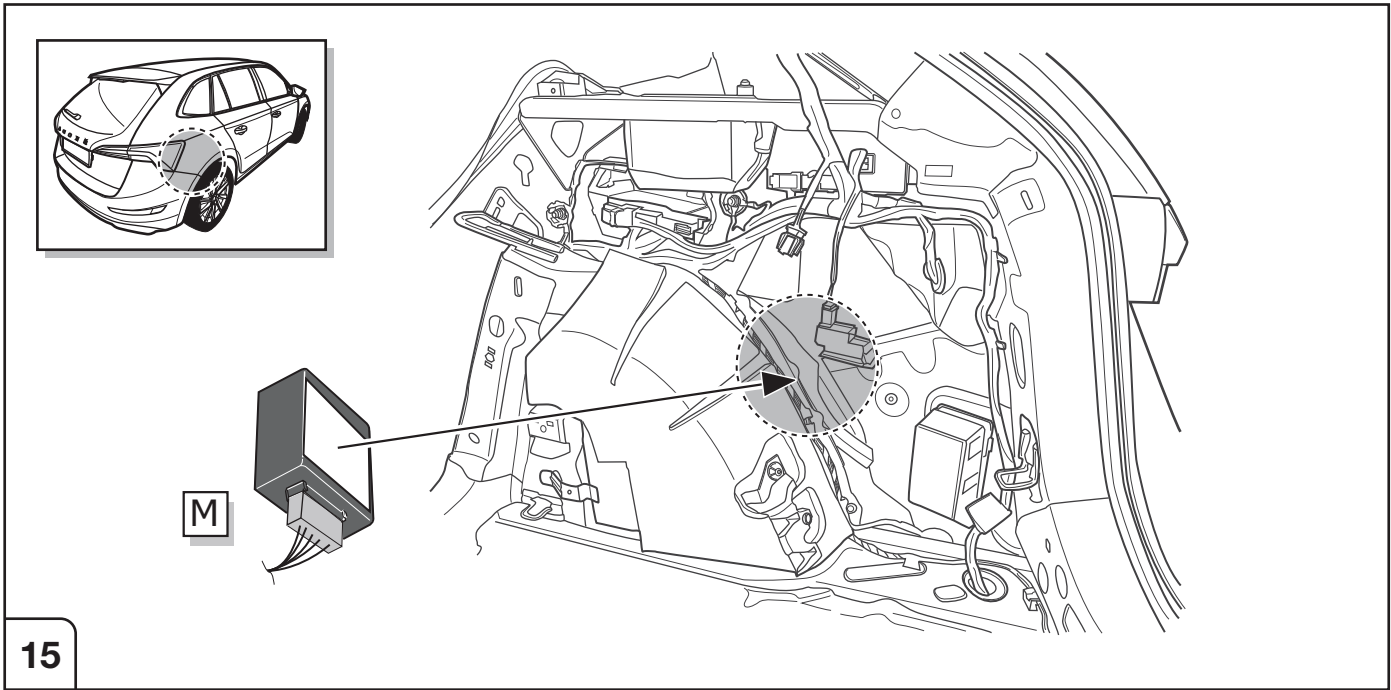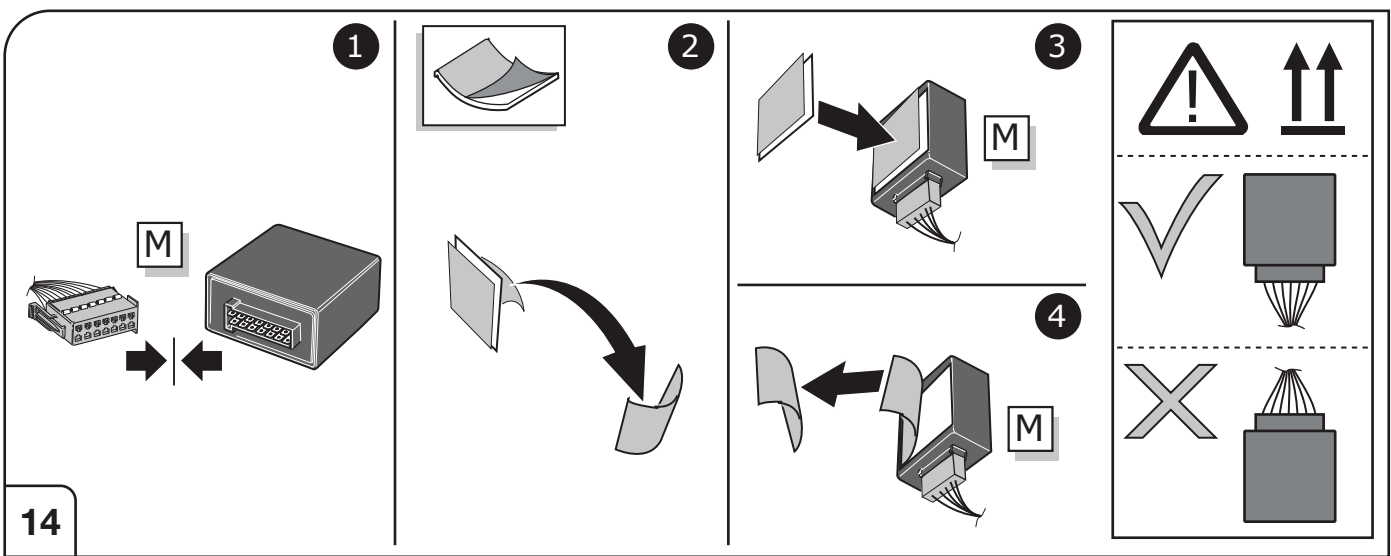





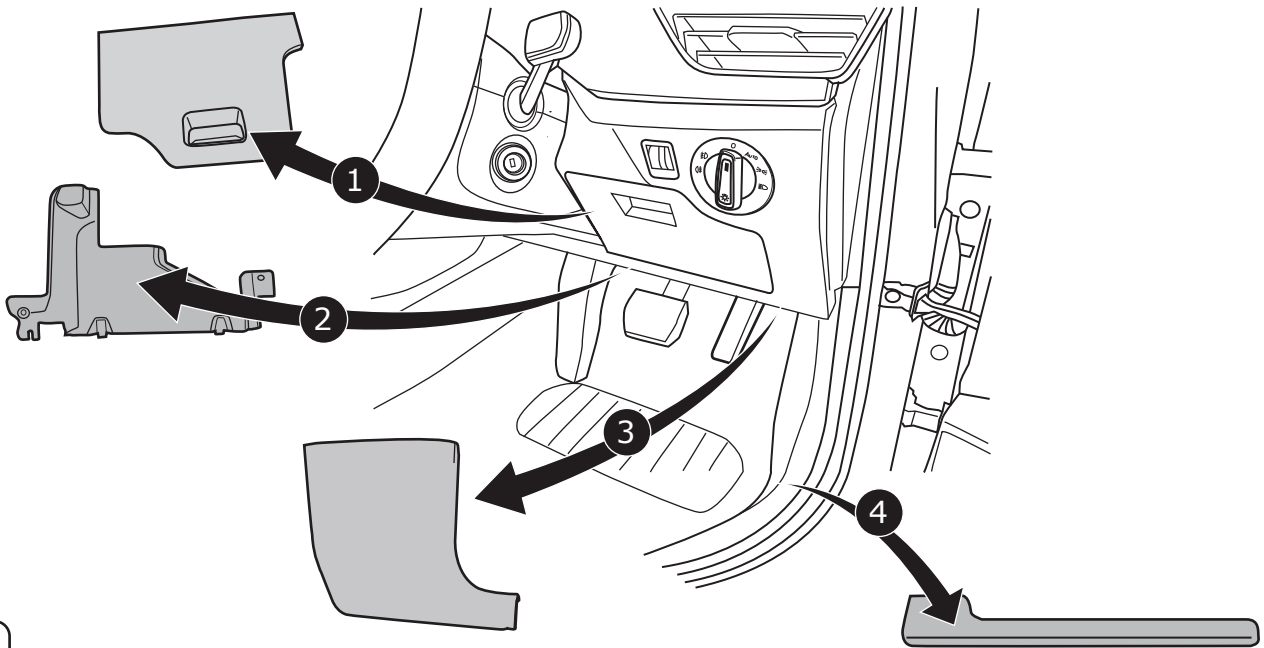


17

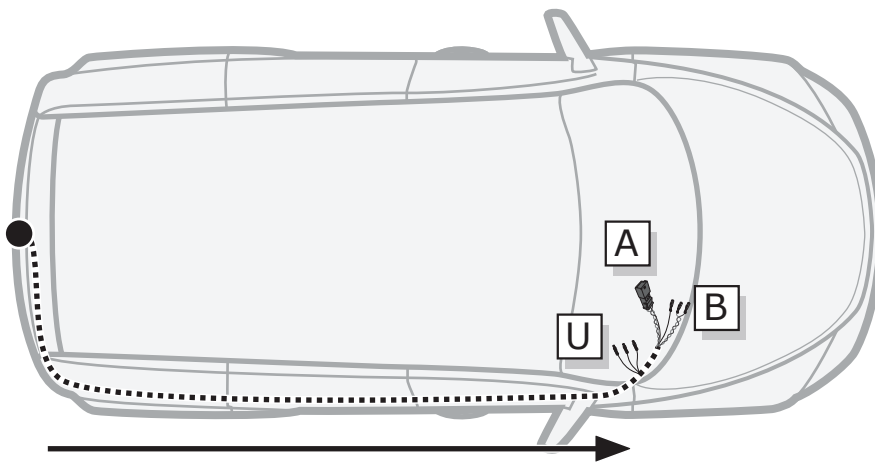

18

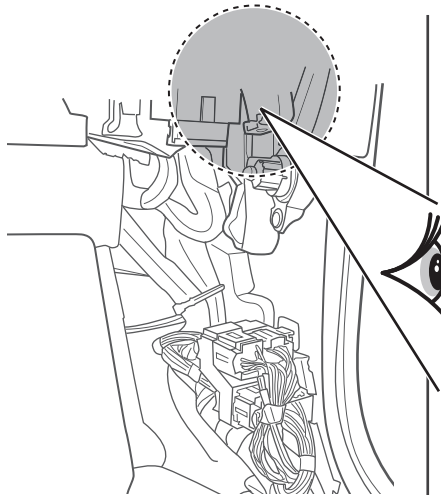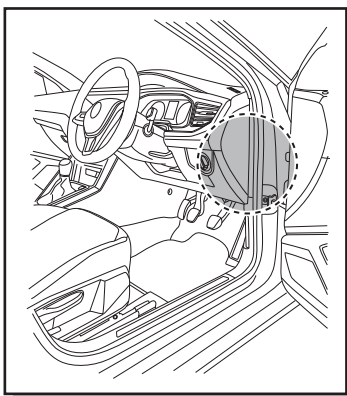


**Body Control Module**

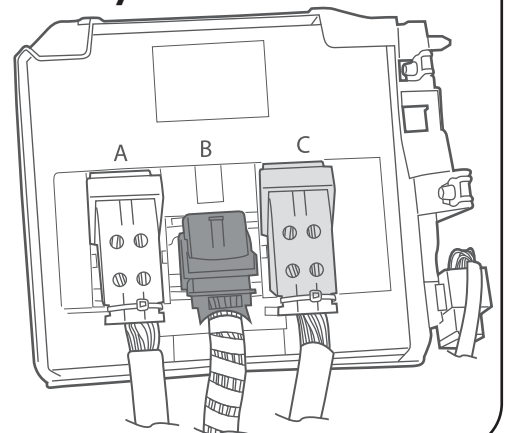

19


# Body Control Module

Option 1

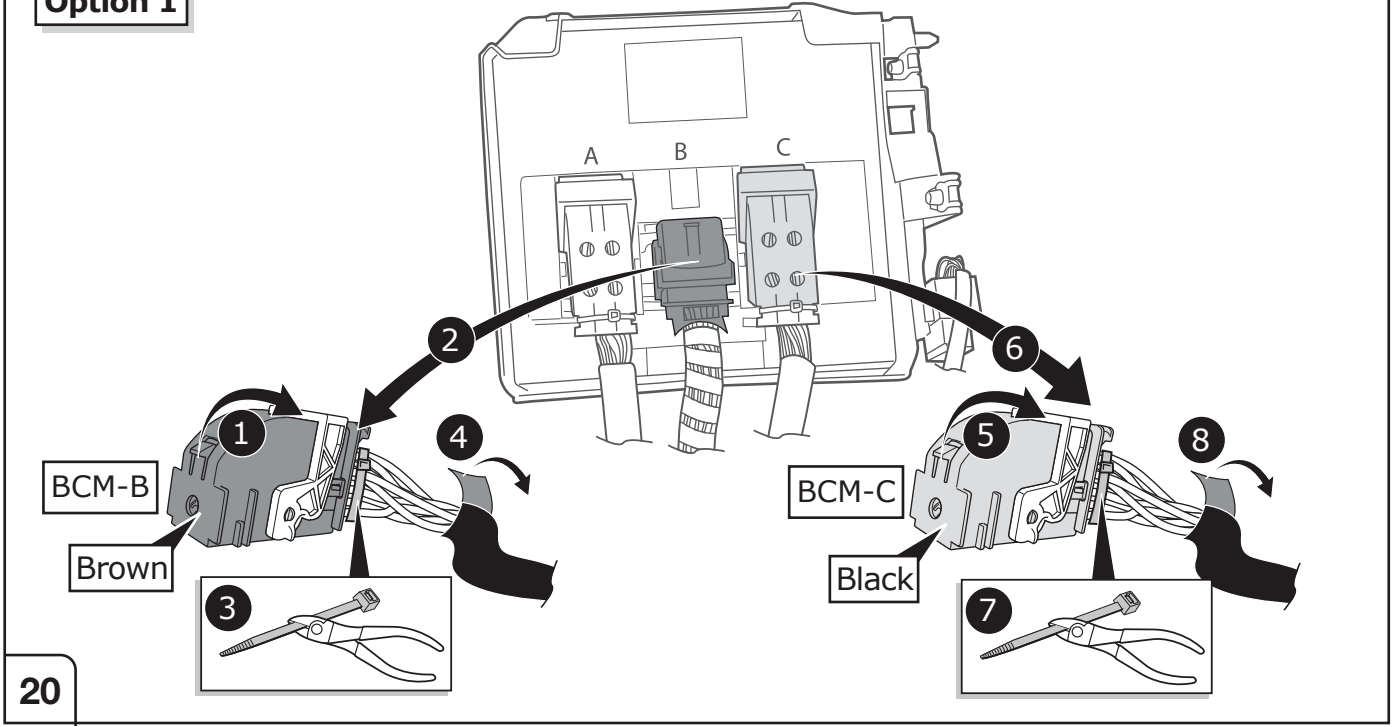


20

Option 1

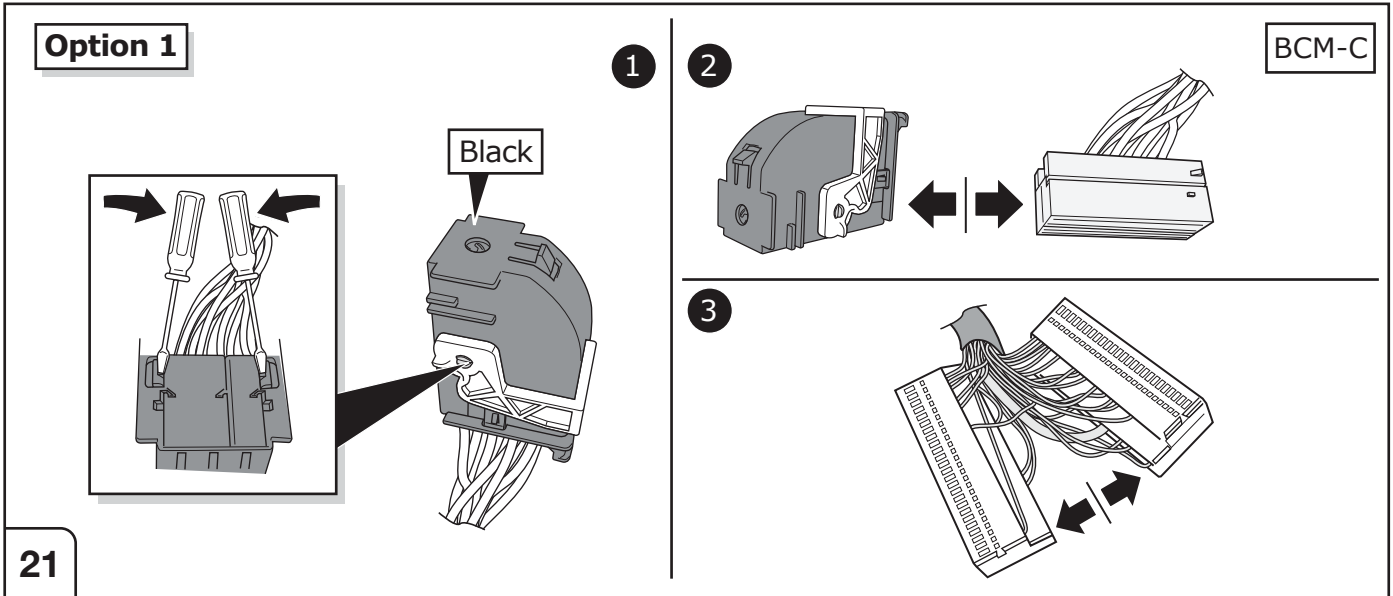

21

Option 1

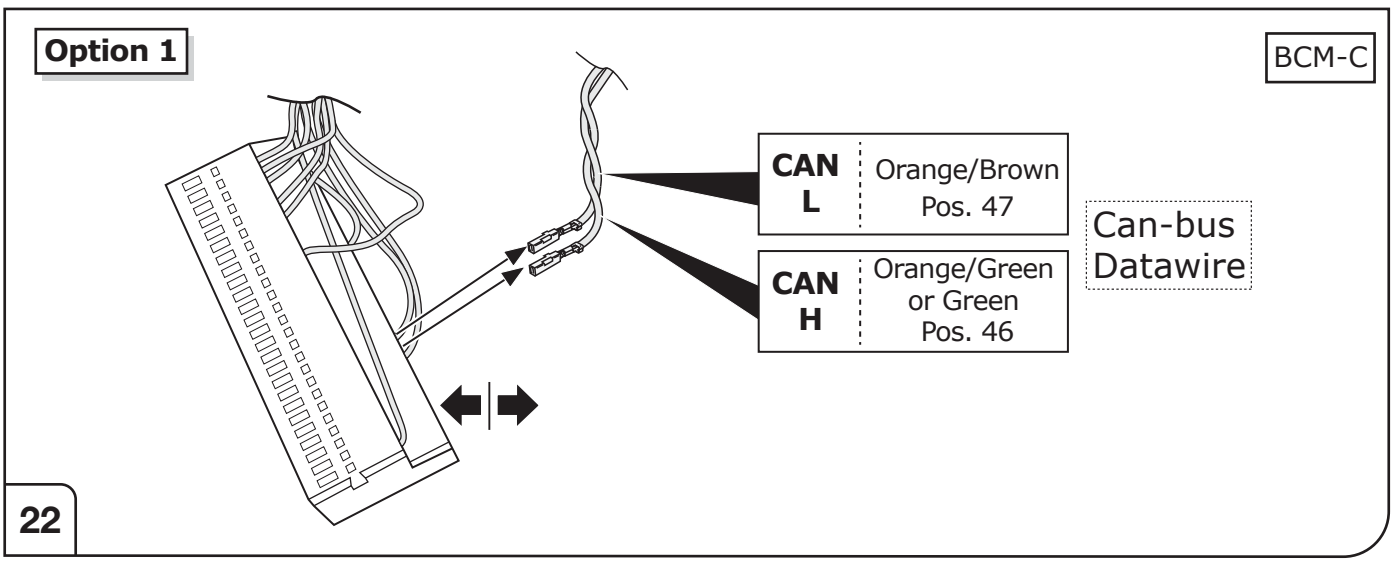


22

**CAN H** Orange/Green or Green Pos. 1




**CAN L** Orange/Brown Pos. 3

**Option 1**

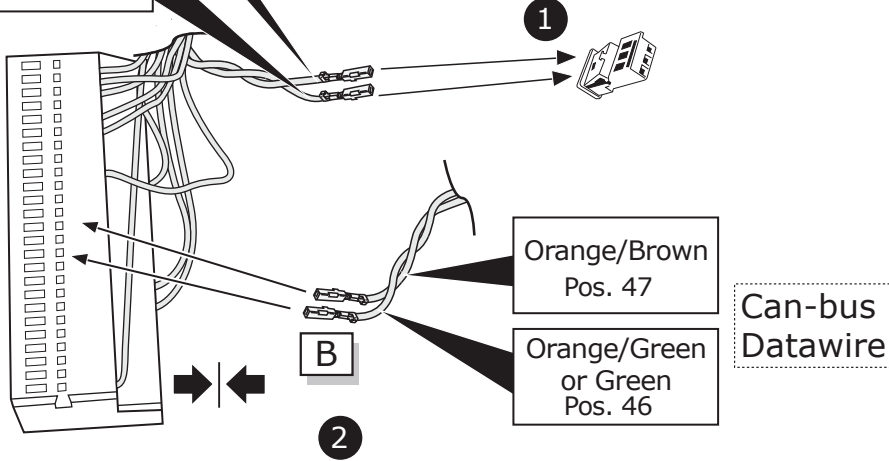

23


**Option 1**

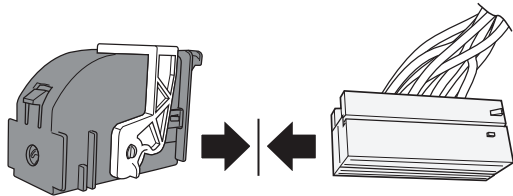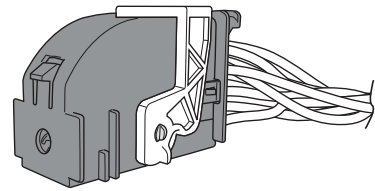


24

**Option 1**


1

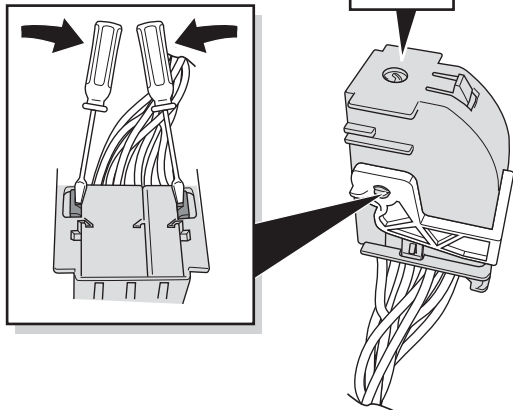

2

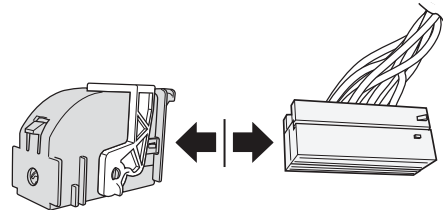

3




25

Option 1

BCM-B

STOP  
Black/Red or Black  
Pos. 10

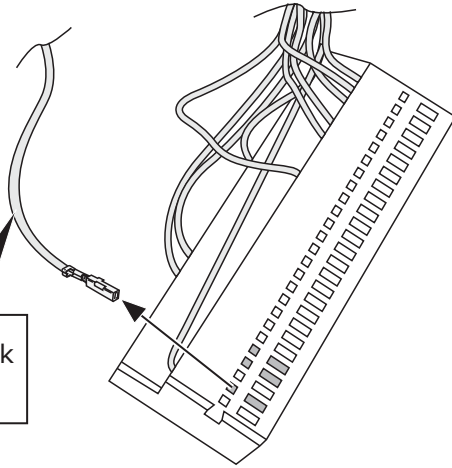

26

Option 1

BCM-B

STOP  
Black/Red or Black  
Pos. 2


STOP  
Blue/Red  
Pos. 10

LOCK

Orange/Green  
Pos. 1

Blue/Red  
Pos. 2

A  
Orange/Brown  
Pos. 3

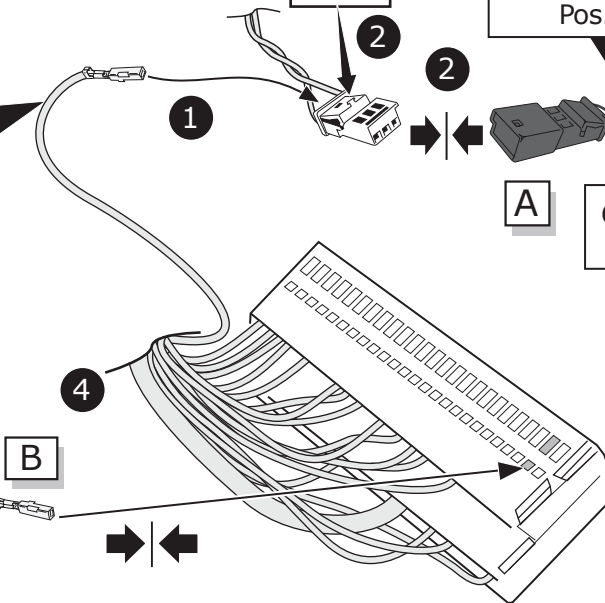


27


Option 1

BCM-B


1



2

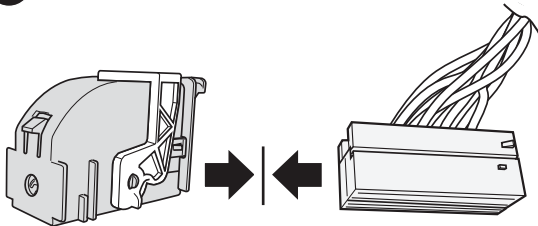

3




28

# Body Control Module


## Option 1

29

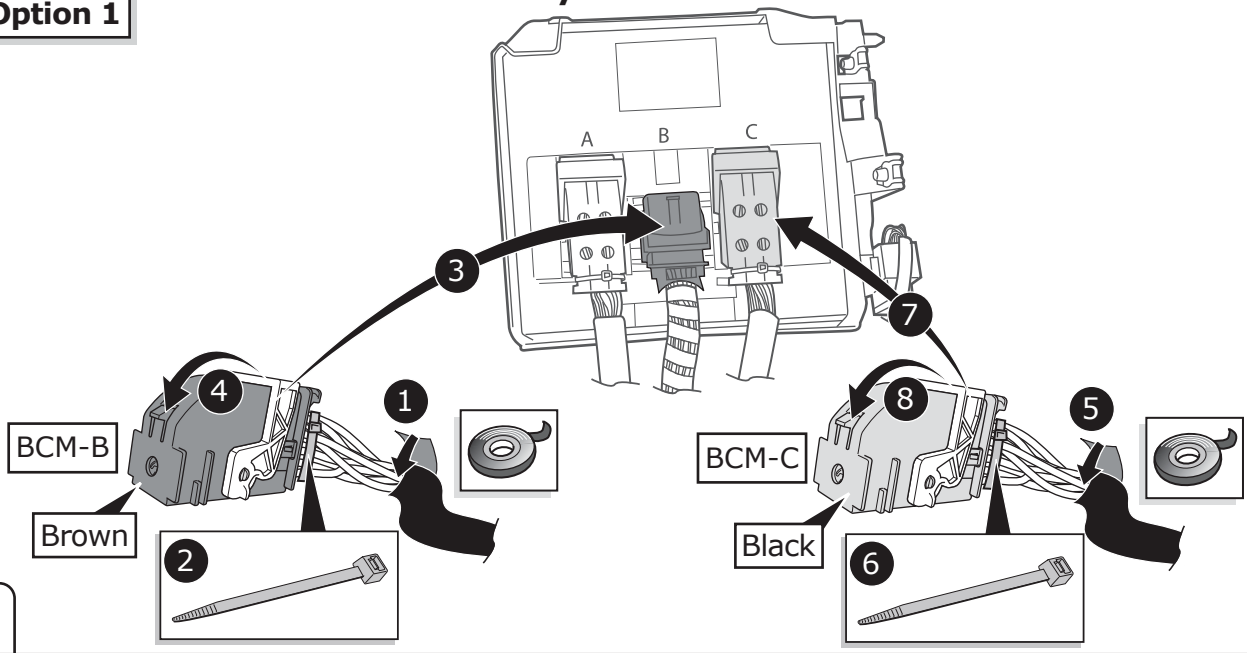


## Option 2


30

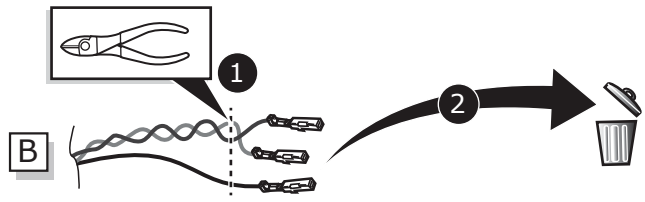


## Option 2

31

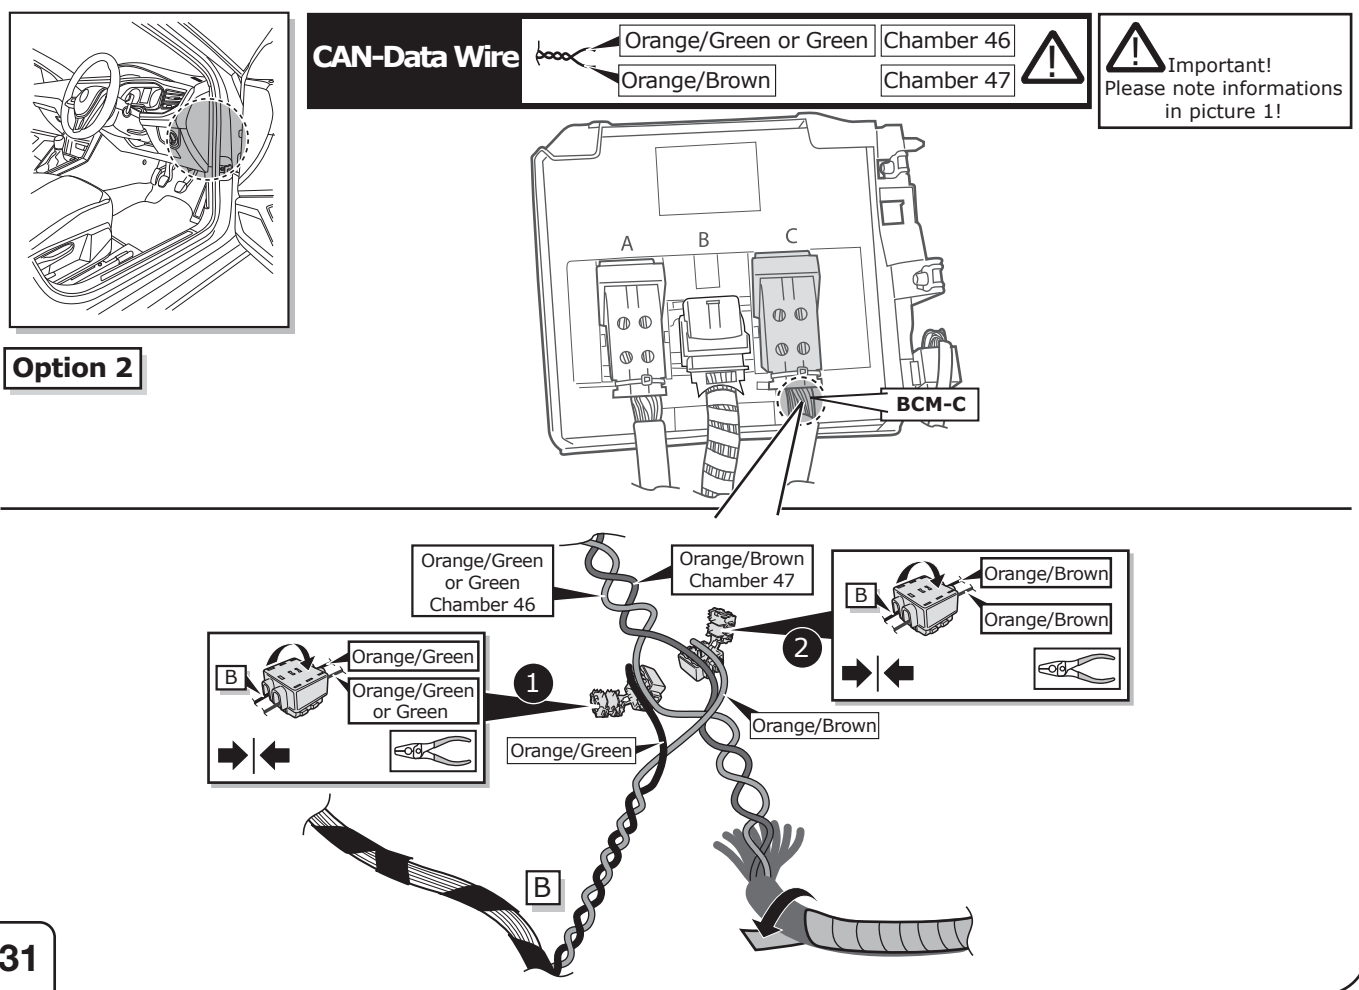





**Option 2**

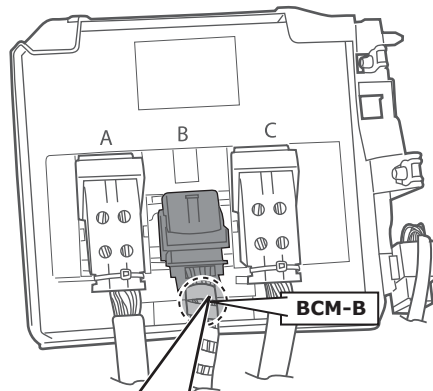


**!** Important!  
Please note informations  
in picture 1!

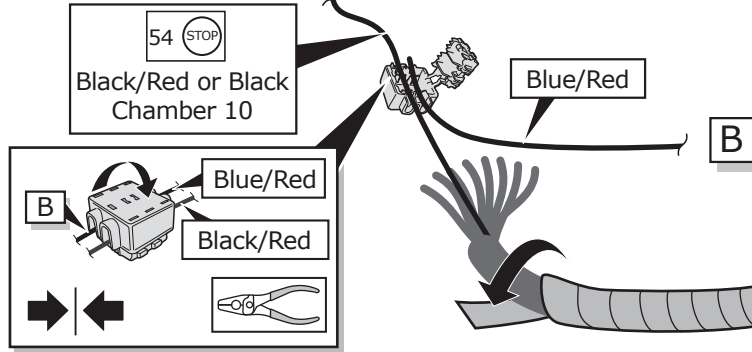

32

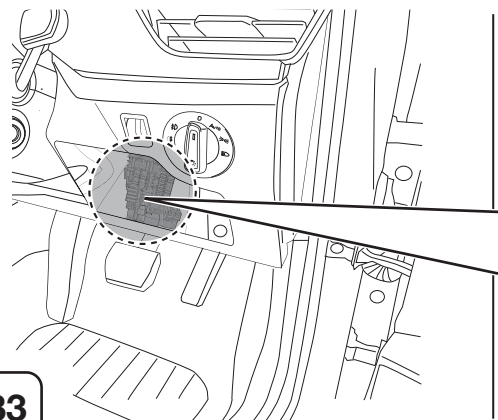

33

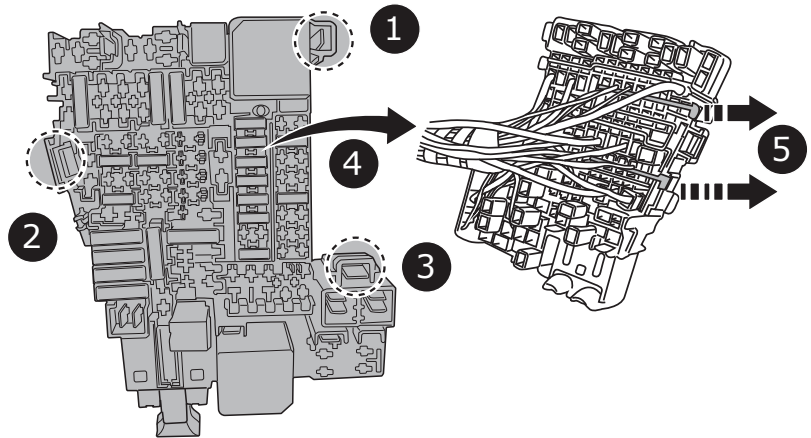

**OPTION 1**

35 → 37

45 → 55




**If only B+ /30 for module needed!  
And unoccupied Little Fuse B+ /30 for  
socket available!**

**OPTION 2**

38 → 55




**There is no unoccupied Little Fuse B+ /30 for  
socket available!  
If additional +15 on the socket needed!**

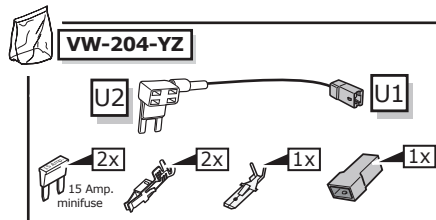


34

**OPTION 1**

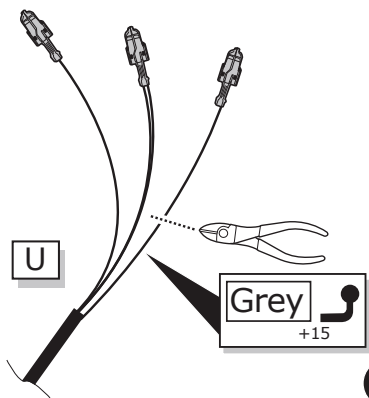


1

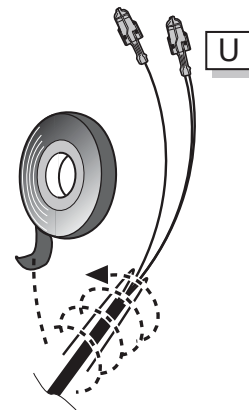

2


35

**OPTION 1+2**

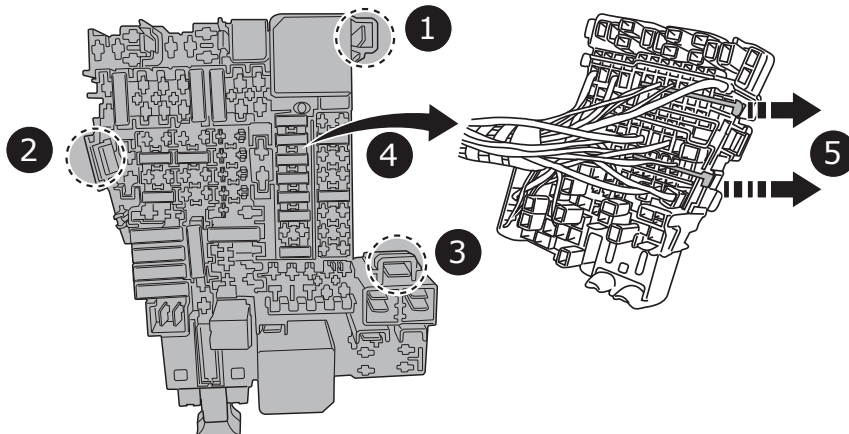

36

**OPTION 1**

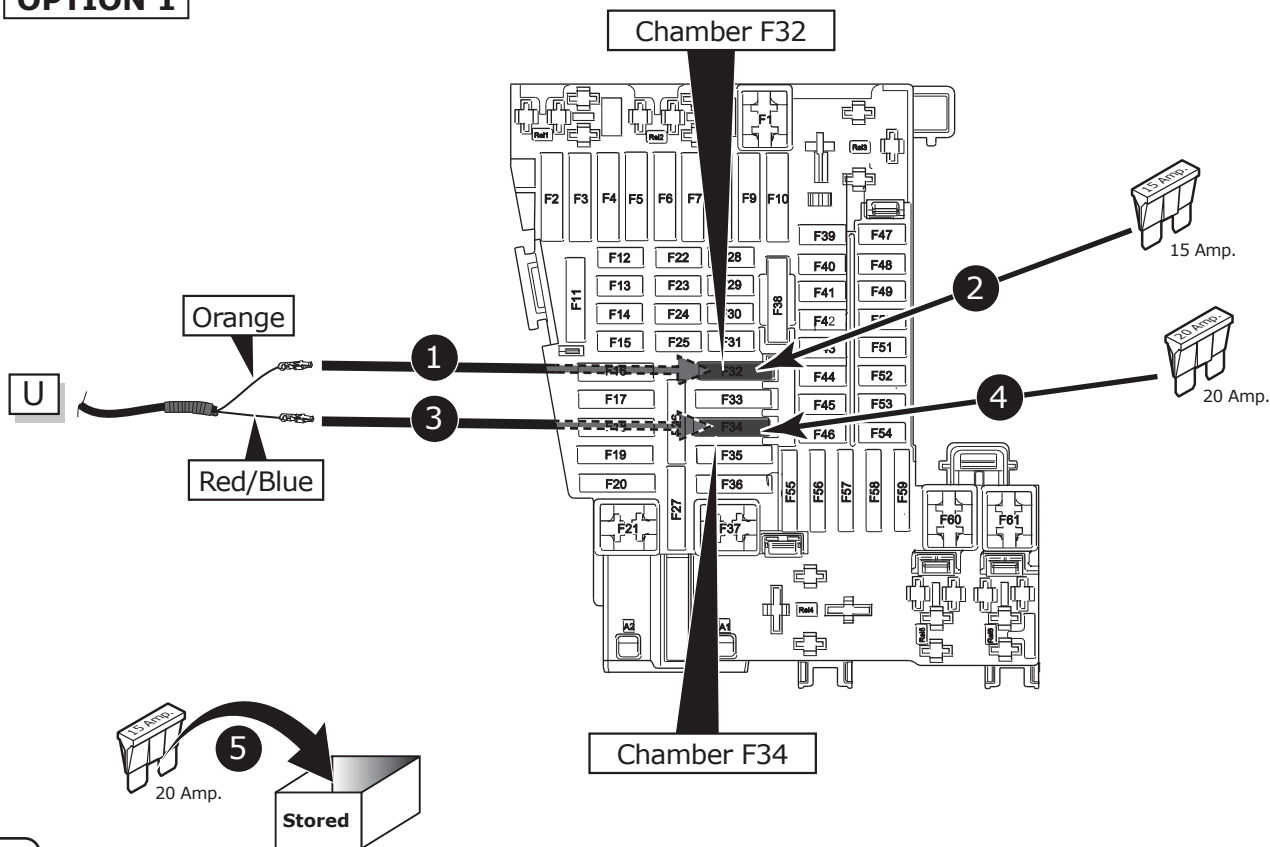


37

**OPTION 2**




**VW-204-YZ**

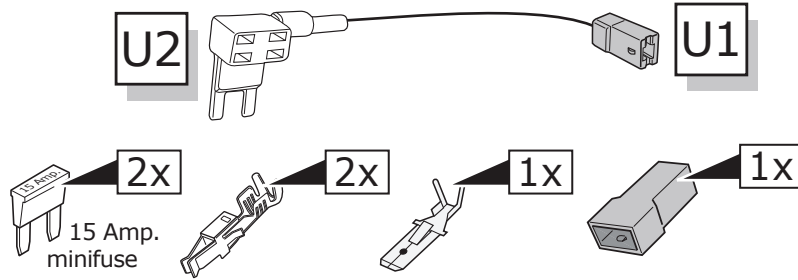


38

**OPTION 2**

Red/Blue +30

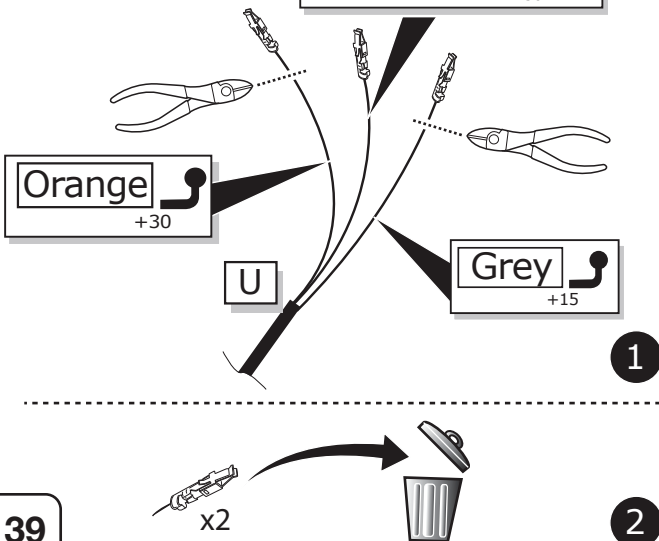



39

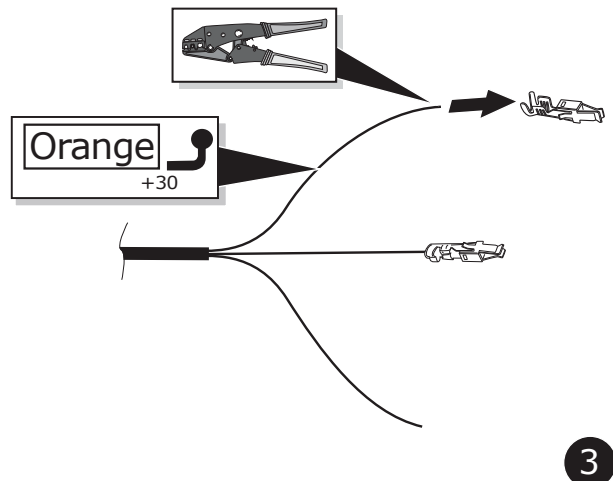

**OPTION 2**

Orange +30

Choose any unoccupied mini fuse position!

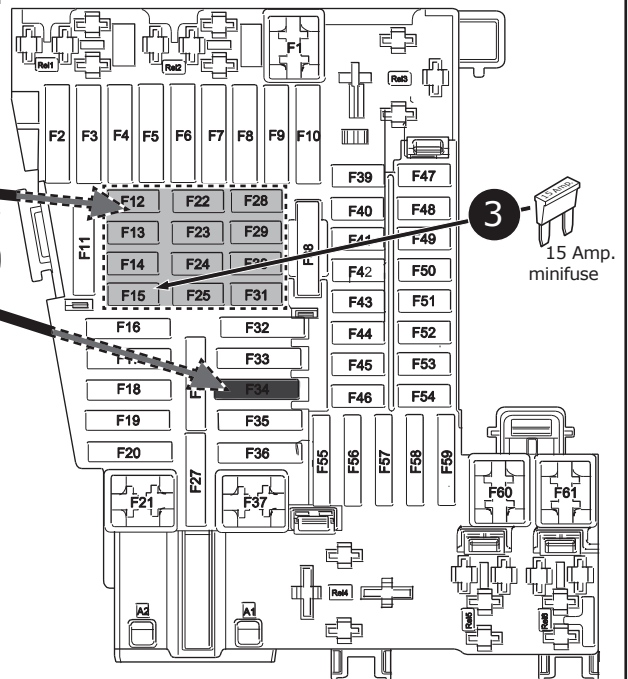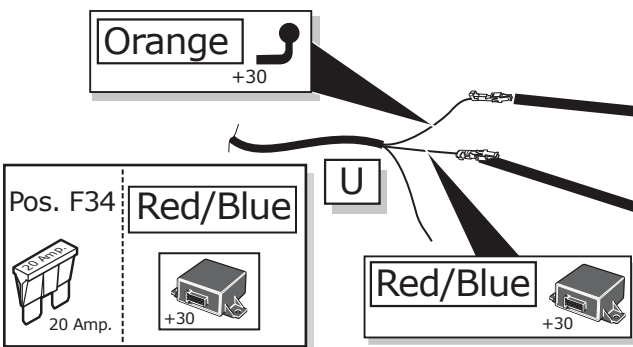

Position

Manual


15 Amp. minifuse

Orange +30


40




**OPTION 2**

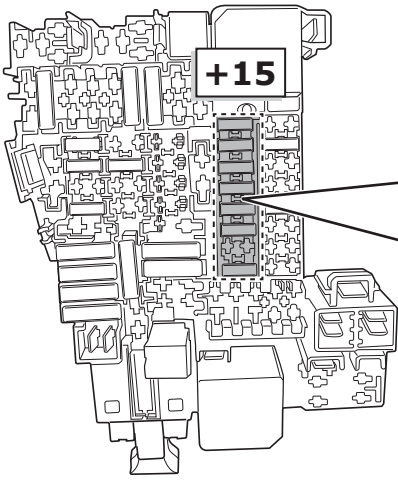

**Option A** If there is an unoccupied position for +15

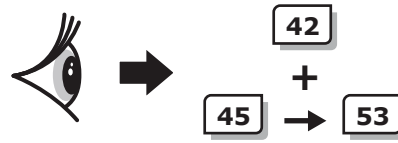

**Option B** If there is no unoccupied position for +15





41

**OPTION 2**

**Option A**

A warning triangle icon with an exclamation mark. To its right is a diagram of a terminal block with a pencil pointing to a position labeled 'Position'. Below that is an icon of an open book labeled 'Manual'. At the bottom is a label for a 'Grey 15 Amp. minifuse'.


Choose any unoccupied position!

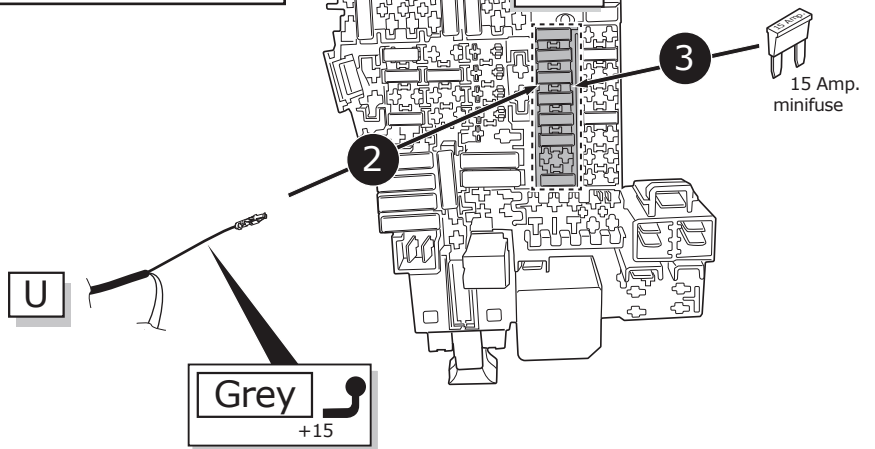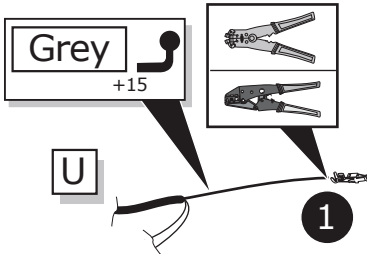

42


**OPTION 2**

**Option B**

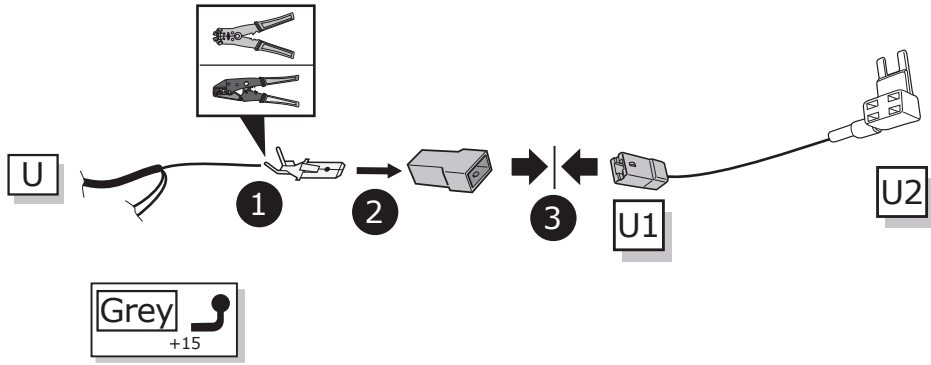


43

**OPTION 2**

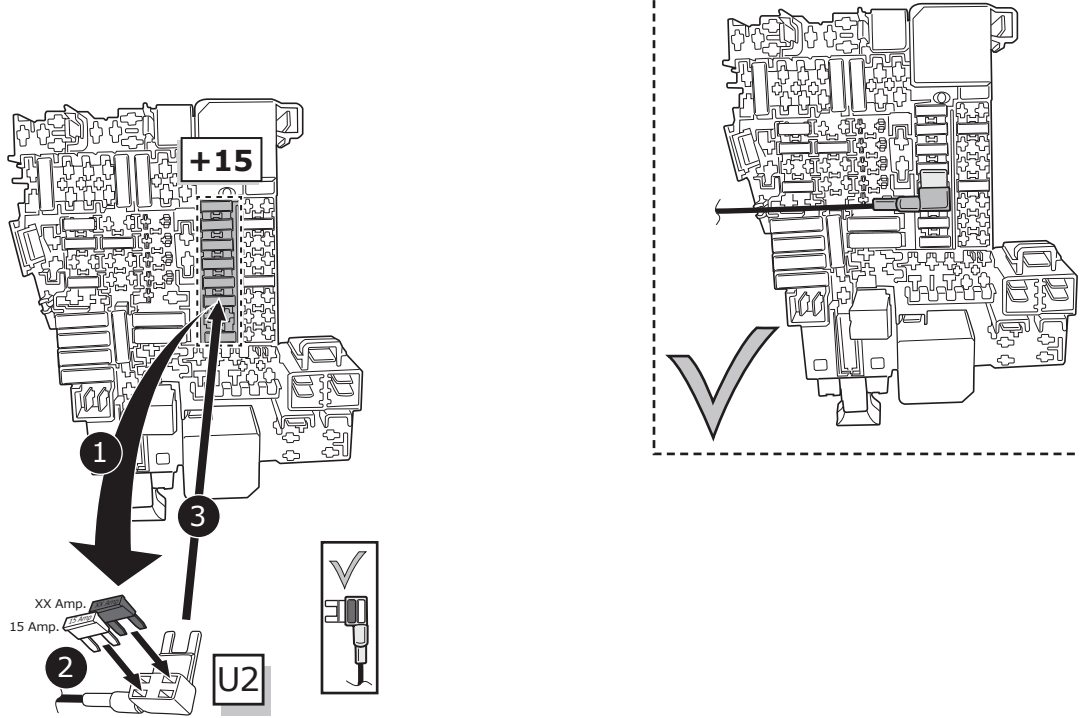

44

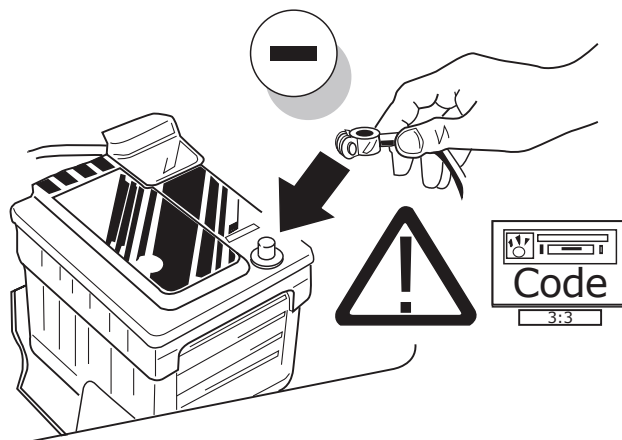

45

## Set up trailer operation



### Diagnosis Services or diagnostic methods (local / offline):

#### Please note:

Always use the latest diagnostic version!  
The vehicle to be coded must be supported by the diagnostic service provider and already be implemented in the diagnostics version!  
Please contact your diagnostic service provider in case of any question.

- ODIS (step 45)
- Hella Gutmann
- VCDS
- Autologic
- Bosch / KTS
- SP Diagnostic
- SUN
- Jifeline
- Autocom
- etc. pp.

46

## Set up trailer operation

### CODING WITH ODIS

#### Please note:

The procedure described below for encoding and enabling the trailer mode only serves for a general orientation and can vary greatly depending on the model (motorisation / equipment). If necessary less or further control units will have to be adapted.

**After connecting to ODIS, the "69 trailer function" controller has to be set to encoded in the target installation list.**

The following may be necessary in the further course of work:

#### EZE\_09 (electronic central electric controller):

Diagnosis  
(possible login code: 31347)  
Networking plan  
Controller self-diagnosis  
Encode  
Trailer connection device >installed  
or: hitch\_ecu >installed

#### Alternative encoding EZE\_09 as follows (MY 2017 >>):

Self diagnose control unit  
Access authorization >31347  
Adjustment  
Integration  
Trailer control unit > installed

#### ZKS\_46 (Central module convenience system)

trailer monitoring >put on active  
trailer control unit >installed

#### SWA\_3C (Lane Change Assist)

ECU for draw bar >with ECU for draw bar

#### SW2\_CF (Lane Change Assist2)

ECU for draw bar >with ECU for draw bar

#### SCH\_17 (Dash panel insert)

Trailer >yes

#### RFK\_6C (reverse camera system)

equipment\_ahk >installed

#### STF\_74 (chassis control system)

Trailer >installed

#### EPH\_76 (PDC controller)

Trailer >trailer device can be removed manually

#### DIS\_13 (controller distance control

(possible login code: 20103)  
Control module for towing sens >installed

#### Alternative encoding DIS\_13 as follows:

Self diagnose control unit  
Access authorization >20103  
Encoding  
Binary encoding  
**Byte 3**  
Binary >xxxx1xxx  
or Hex >+8

#### FFF\_A5 (front sensor system controller)

AAG >coded

#### HDE\_6D (boot lid electronics controller)

Trailer >installed

#### Important note on encoding and activating in trailer mode

The aforementioned settings are carried out in the vehicle's electrical system and saved locally. During general updates for the vehicle software (for example, within the scope of service or repair work), the settings may be overwritten and deleted under certain circumstances. In this case, the trailer mode activation has to be updated again locally after the update. Diagnostic information relating to the trailer mode that may appear during variance comparisons with the data saved in the manufacturer's works, may form the basis of the local activation.



47

The following light functions for the trailer are **not supported** by all towing vehicles with DRL circuit:



- Rear lights
- Side lights
- Numberplate lights

The **taillights or dimmed headlights** must be switched on to activate this function!

48

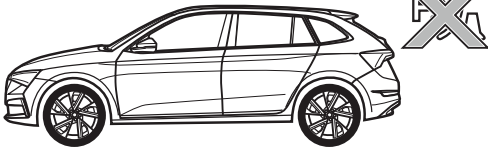

49


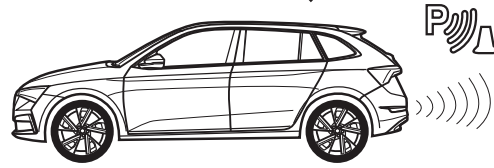



Optional





Trailer Simulator for 7- and 13-pin Sockets

50

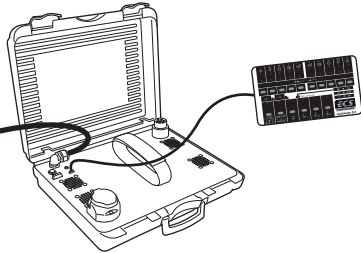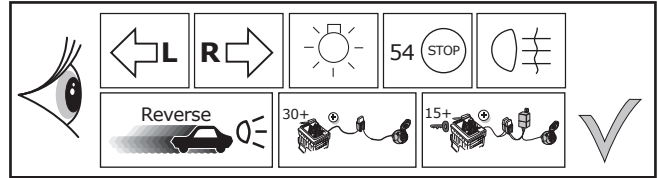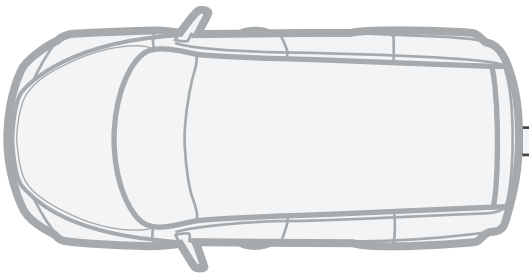


51

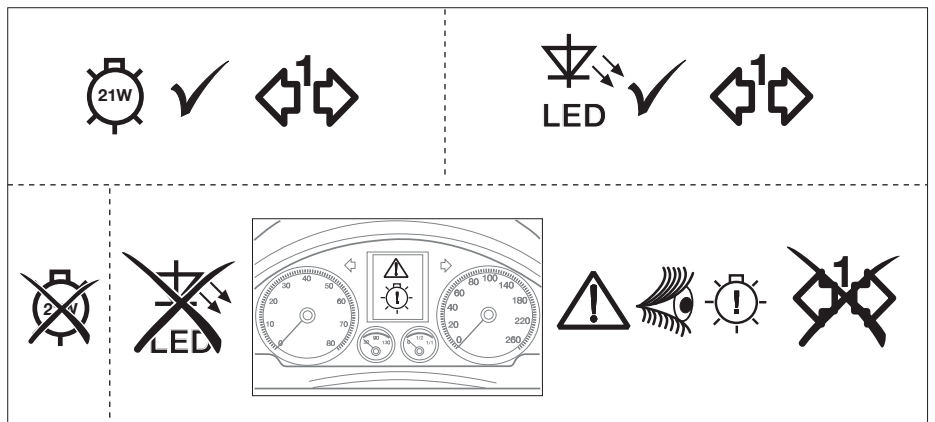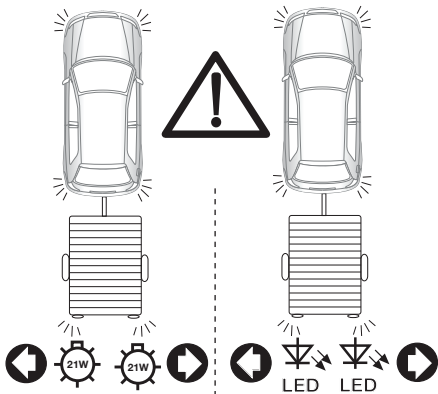



52

**Optional**


**Adapter socket**

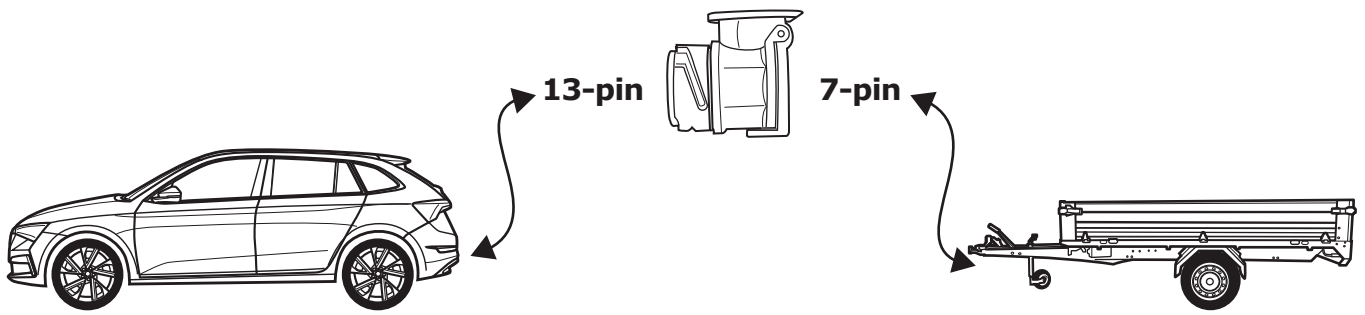

53

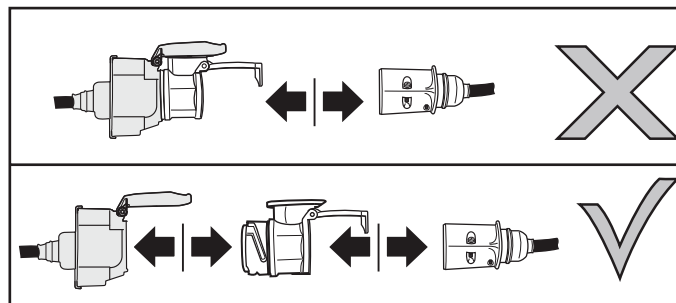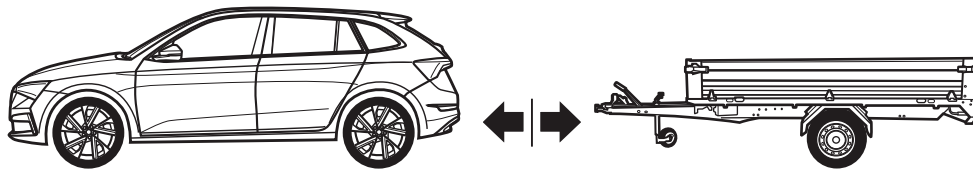

54

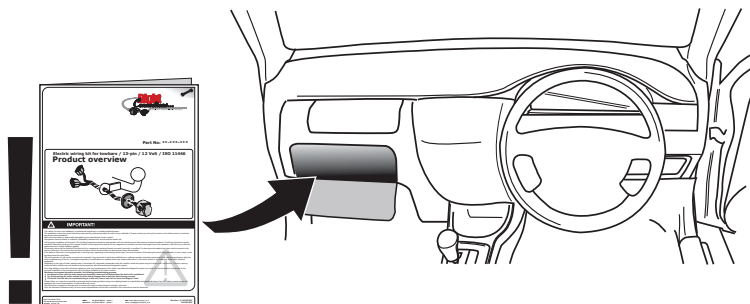

55